


# DH1-xxSxxS Series

DC-DC Converter | 1W | SIP7 | Fixed voltage input, unregulated output | 6000VDC

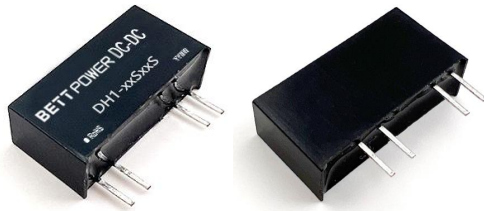

## Features

- SIP7 package
- Operating Temperature Range: -40°C ~ +105°C
- Isolation Voltage: 4200VAC/6000VDC
- Medical-grade DC-DC power supply
- Full Load Efficiency: up to 85% (typ.)
- Continuous short circuit protection
- Designed to meet IEC/EN/BS EN/UL 62368

## Product description



The DH1-xxSxxS series is 1W unregulated DC/DC converters which features high isolation voltage of 4200VAC and 6000VDC and continuous short circuit protection. They are specially designed for applications where require compact size, high isolation, low isolation capacitor and low leakage current power. Typical applications are electricity, IGBT driver applications, etc.

## Selection Guide

Certification	Part No.	Input Voltage	Output			Full Load Efficiency (%) Typ.	Capacitive Load (μF) Max.
		Nominal (Range) (VDC)	Voltage (VDC)	Current (mA) Min.	Current (mA) Max.		
EN/UL Pending	DH1-03S03S	3.3(2.97-3.63)	3.3	30	303	79	4000
	DH1-03S05S	3.3(2.97-3.63)	5	20	200	81	4000
	DH1-05S03S	5(4.5~5.5)	12	8	84	82	1000
	DH1-05S05S	5(4.5~5.5)	3.3	30	303	80	4000
	DH1-05S09S	5(4.5~5.5)	5	20	200	84	4000
	DH1-05S12S	5(4.5~5.5)	9	10	111	84	2000
	DH1-05S15S	5(4.5~5.5)	12	8	84	85	1000
	DH1-12S03S	12(10.8~13.2)	15	6	67	85	680
	DH1-12S05S	12(10.8~13.2)	3.3	30	303	82	4000
	DH1-24S03S	24 (21.6~26.4)	5	20	200	85	4000
DH1-24S05S	24 (21.6~26.4)	3.3	30	303	81	4000	

Note: The above efficiency is measured at nominal input voltage and rated output load.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (Full Load/No-load)	3.3VDC Input	--	380/4	--/10	mA
	5VDC Input	--	242/4	--/10	mA
	12VDC Input	--	80/6	--/12	mA
	24VDC Input	--	61/6	--/14	mA
Reflected Ripple Current		--	200	--	mA
Surge Voltage	3.3VDC Input	-0.7	--	7	VDC
	5VDC Input	-0.7	--	9	VDC
	12VDC Input	-0.7	--	18	VDC
	24VDC Input	-0.7	--	30	VDC
Input Filter Type		Capacitance Filter			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy		See Output Regulation Curve				
Line Regulation	Input voltage variation $\pm 1\%$	3.3VDC output	--	$\pm 1.5$	--	%
		Others	--	$\pm 1.2$	--	%
Load regulation	10%~100% load	3.3VDC output	--	15	--	%
		5VDC output	--	10	--	%
		9VDC output	--	8	--	%
		12VDC output	--	7	--	%
		15VDC output	--	6	--	%
		24VDC output	--	5	--	%
Ripple & noise	20MHz bandwidth (peak-to-peak)	--	60	150	mV	
Temperature coefficient	Full load	--	$\pm 0.03$	--	%/°C	
Short circuit protection		Continuous, self-recovery				

Note: Ripple & noise are measured at 20MHz of bandwidth with a 10uF electrolytic capacitor and a 1uF ceramic capacitor connected inparallel at the output.

## General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, test time 1 minute, leakage current less than 1mA	4200	--	--	VAC
		6000	--	--	VDC
Insulation Resistance	Input-output, insulated voltage 500VDC	10000	--	--	MΩ
Isolation Capacitance	Input-Output,100KHz/0.1V	--	20	--	pF

Operating Temperature	Derating when operating temperature $\geq 85^{\circ}\text{C}$ (See Temperature derating curve chart)	-40	--	105	$^{\circ}\text{C}$
Storage Temperature		-55	--	105	$^{\circ}\text{C}$
Case Temperature Rise	$T_a=25^{\circ}\text{C}$ , Nominal Input, Full Load	--	25	--	$^{\circ}\text{C}$
Storage Humidity	Non-condensing	5	--	95	%RH
Soldering Profile	Wave soldering	260 $\pm$ 5 $^{\circ}\text{C}$ ; Time: 5 - 10s			
	Manual soldering	360 $\pm$ 10 $^{\circ}\text{C}$ ; Time: 3 - 5s			
Switching Frequency	Full load, nominal input voltage	--	220	--	kHz
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$	>3500Kh			

## Mechanical Specifications


Case Material	Black flame-retardant heat-resistant plastic (UL94V-0)
Mechanical Dimensions	19.60 * 6.00 * 10.10 mm
Weight	2.4g (typ.)
Cooling Method	Free air convection

## Electromagnetic Compatibility (EMC)


EMI	CE	CISPR32/EN55032 CLASS B (EMC recommended circuit see Fig. 2)		
	RE	CISPR32/EN55032 CLASS B (EMC recommended circuit see Fig. 2)		
EMS	ESD	IEC/EN61000-4-2	Contact $\pm 8\text{KV}$	perf. Criteria B

Product Characteristic Curve


Temperature Derating Curve

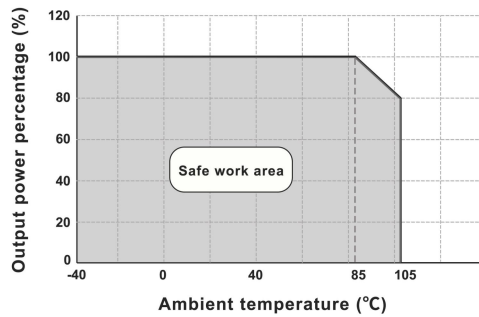


Output Regulation Curve(3.3V Output)

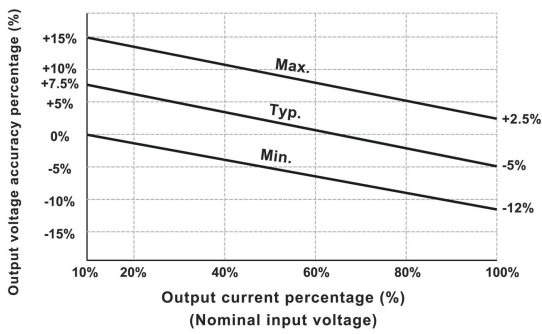


Output Regulation Curve (Others)

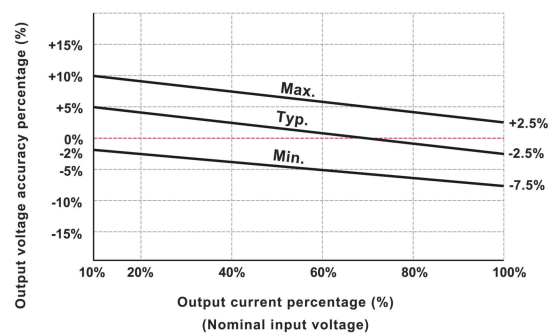

Efficiency VS Input Voltage (Full Load, DH1-05S05S)

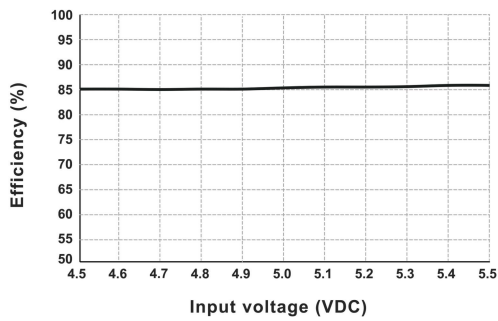


Efficiency VS Output Load (Vin=5V, DH1-05S05S)

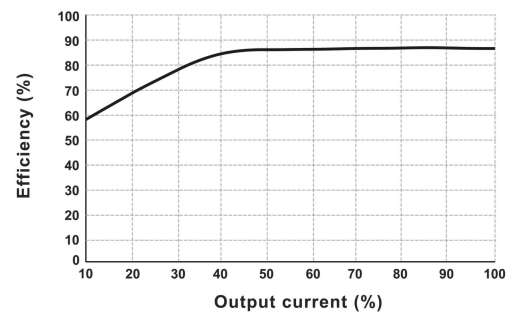

## Design Reference - Application circuit

Application circuit

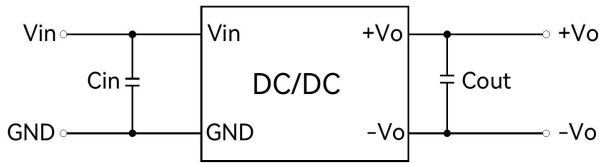

(Figure 1)


Recommended Capacitive Load Value Table

Vin	Cin	Vo	Cout
3.3/5VDC	4.7uF/16V	3.3/5VDC	10
12VDC	2.2uF/25V	9VDC	4.7
15VDC	2.2uF/25V	12VDC	2.2
24VDC	1.0uF/50V	15VDC	1.0
--	--	24VDC	0.47

All DC/DC converters in this series are tested according to the recommended application circuit (Figure 1) before the shipment. If further reduction of input/output ripple is required, the external input/output capacitors  $C_{in}$  and  $C_{out}$  can be increased, or capacitors with lower series equivalent impedance can be selected. For each output, under safe and reliable operating conditions, the maximum capacitance of the filter capacitor must not exceed the maximum capacitive load of the product.

## Design Reference - EMC Solutions - Recommended Circuits

EMC Recommended Circuit Design and Application

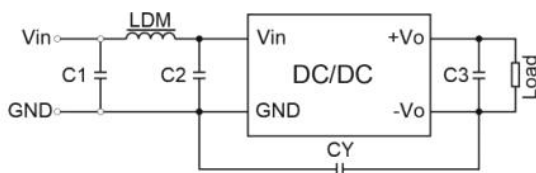

(Figure 2)

Recommended Parameter Table

C1	4.7μF /50V
C2	4.7μF /50V
C3	Refer to the $C_{out}$ parameter in Figure 1
LDM	6.8μH

Note:

### 1. Typical Application

To further reduce input and output ripple, a Capacitance Filter network can be connected at the input and output terminals. The application circuit is shown in Figure 1. However, care should be taken to select appropriate filter capacitors. If the capacitor is too large, it may cause startup issues. For each output, under conditions ensuring safe and reliable operation, the recommended capacitive load values are detailed in the table.


### 2. EMC Recommended Circuit: See Figure 2

### 3. Output Load Requirements

To ensure efficient and reliable operation of the module, the minimum output load during use should not be less than 10% of the rated load. If the required power is indeed small, please connect a resistor in parallel at the output terminal (the sum of the power consumed by the resistor and the actual used power should be greater than or equal to 10% of the rated power).

## Dimensions and Recommended Layout


DH1-xxSxxS Dimensions and Recommended Layout

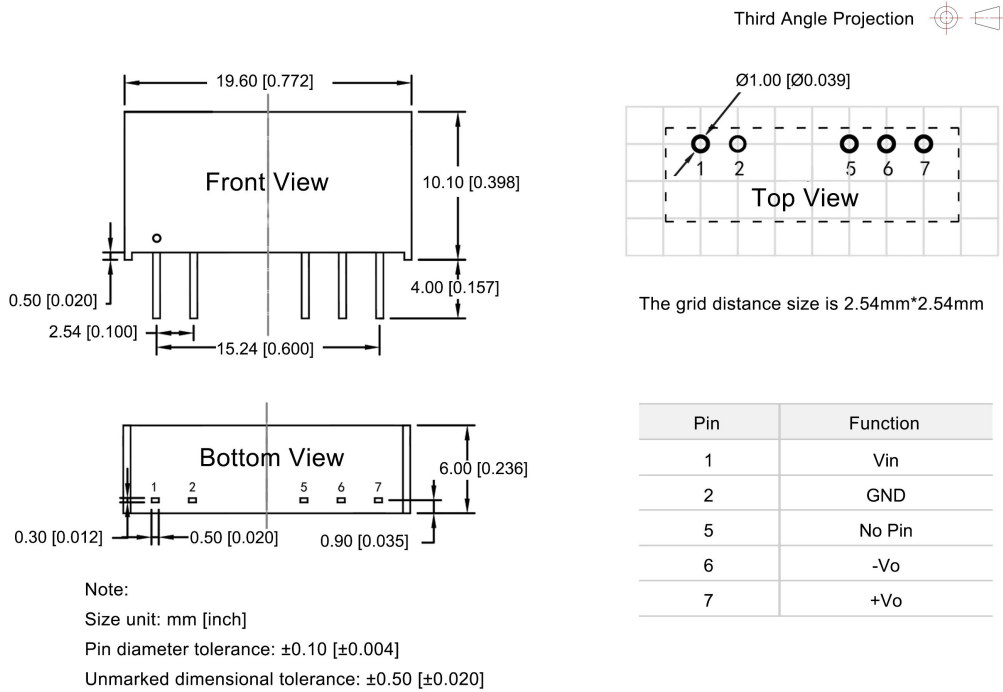

## Packaging Information

Model series (Tube packaging)	Quantity per tube (pcs/ tube)	Quantity of electrostatic bag (pcs/ bag)	Quantity of inner box (pcs/ box)	Full box Quantity (pcs)
DH1-xxSxxS	26	416	1664	6656

The schematic diagram of tube packaging is shown below:

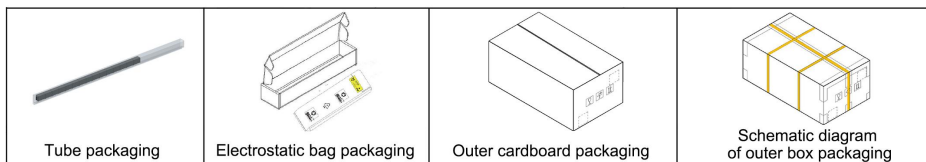

## Product precautions

1. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage;
2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product;
3. The maximum capacitive load is tested within the input voltage range and under full load conditions;
4. Unless otherwise specified, all indicators in this manual are measured at  $T_a=25\text{ }^\circ\text{C}$ , humidity<75% RH, nominal input voltage, and output rated load;
5. All indicator testing methods in this manual are based on our company's corporate standards;
6. Our company can provide product customization, and specific requirements can be directly contacted by our technical personnel;
7. Product specifications are subject to change without prior notice.

## Manufacturer contact information

### Bettpower Guangzhou Electronic Technology Co., Ltd.

Website: [www.bettpower.com](http://www.bettpower.com)

Telephone: +86 - 020 - 32166256

Email: [info@bettpower.com](mailto:info@bettpower.com)

Address: Room 2514-2515, Building A1,1 Doutang Road, Huangpu District, Guangzhou, China

BETTPOWER is a registered trademark of BETTPOWER Guangzhou Electronic Technology Co., Ltd. All of its product names, models, trademarks and brands are the property of the Company.

BETTPOWER Guangzhou Electronic Technology Co., Ltd reserves all rights and the right of final interpretation.