

# AD30-23Sxx Series

AC-DC Converter | 30W | Compact size | DIP | 4000VAC | 85~305VAC



## Features

- Package Type: DIP
- Universal Input: 85~305VAC / 100~430VDC
- Operating temperature range: -40°C ~ +85°C
- Isolation voltage: 4000VAC
- High efficiency up to: 89%(Type\_
- Overvoltage category III (OVC III)
- Bare metal can meet EMI: CLASS B
- Designed to meet IEC/EN/UL62368,EN60335,EN61558

## Product description



AD30-23Sxx series is a 30W miniature AC DC module-type power supply provided by BETTPOWER. This series features the universal input voltage range of 85-305Vac, low power consumption, high efficiency, high reliability, and reinforced isolation. The entire series is compliance with BS EN/EN55032 Class B without the need of any additional components. The EMC and safety specification design complies with IEC/EN61000-4, CISPR32/EN55032, IEC/EN/UL62368, EN60335, EN61558. These power supply modules are widely used in industries, power generation, household appliances, instrumentation, communication, and civil applications.

## Selection Guide

Certification	Part No.	Input Voltage (VAC)	Out Power (W)	Out Voltage (VDC)	Out Current Max.(mA)	Full Load Efficiency %(230VAC,Typ.)	Capacitive Load Max.(μF)
EN/UL pending	AD30-23S03	85~305	19.8	3.3	6000	85	6600
	AD30-23S05	85~305	30	5	6000	86	6600
	AD30-23S09	85~305	30	9	3400	88	4400
	AD30-23S12	85~305	30	12	2500	89	4400
	AD30-23S15	85~305	30	15	2000	89	3300
	AD30-23S18	85~305	30	18	1670	87	3300
	AD30-23S24	85~305	31	24	1300	88	1000
	AD30-23S48	85~305	30	48	630	89	470

Note:

1. All the above data were tested within the parameter range of typical application circuits;
2. The product images are for reference only. Please refer to the actual product for details.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input	85	--	305	VAC	
	DC input	3.3/5/9/12/15/24V	100	--	430	VDC
		48V	120	--	430	VDC
Input Current	115VAC	--	--	1.0	A	
	230VAC	--	--	0.5	A	
Inrush Current	115VAC	--	25	--	A	
	230VAC	--	50	--	A	
Input Frequency		47	--	63	Hz	
Recommended External Input Fuse		3.15A/300V, slow-blow, required				
Leakage Current	230VAC/50Hz	0.1mA RMS Max.				
Hot Plug		Unavailable				

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	3.3V	--	±3	--	%	
	5/9/12/15/24/48V	--	±2	--		
Line Regulation	Full load	--	±0.5	--	%	
Load Regulation	0 ~ 100% load	3.3V Output	--	±2.0	--	%
		5V Output	--	±1.5	--	%
		9/12/15/18/24/48V Output	--	±1.0	--	%
Ripple & Noise*	20MHz bandwidth (peak-to-peak value), 5% ~ 100% load	--	100	150	mV	
Temperature Coefficient		--	±0.02	--	%/°C	
Stand-by Power Consumption	230VAC	--	0.30	0.55	W	
Min. Load		0	--	--	%	
Over-current Protection		110	--	--	%Io	
Short Circuit Protection		Continuous, Self-Recovery				
Hold-up Time	230VAC	--	50	--	ms	

Note: Ripple & noise are measured at 20MHz of bandwidth with a 10uF electrolytic capacitor and a 1uF ceramic capacitor connected inparallel at the output.

## General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, test time 1 minute, leakage current less than 5mA	4000	--	--	VAC
Insulation Resistance	Input-output, insulated voltage 500VDC	100	--	--	MΩ

Power Derating	-40°C ~ -25°C	Input voltage	5V	2.67	--	--	%/°C
		<115VAC	3.3/9/12/15/24/48V	1.33	--	--	%/°C
			+50°C ~ +70°C	2.5	--	--	%/°C
			+70°C ~ +85°C	0.67	--	--	%/°C
			85VAC ~ 100VAC	1.67	--	--	%/VAC
		277VAC ~ 305VAC	0.72	--	--	%/VAC	
Operating Temperature			-40	--	85	°C	
Storage Temperature			-40	--	85	°C	
Storage Humidity	Non-condensing		--	--	95	%RH	
Soldering Profile	Wave-soldering		260 ± 5°C; time: 5 - 10s				
	Manual-welding		360 ± 10°C; time: 3 - 5s				
Safety Standard	Product design conforms to IEC/EN/BS EN62368-1, EN61558-1, EN60335-1; UL62368-1						
Safety Class			CLASS II				
MTBF	MIL-HDBK-217F@25°C		>500,000h				


## Mechanical Specifications

Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)
Package Dimensions	69.50 * 39.00 * 24.00mm
Weight	102g(Typ._
Cooling Method	Free air convection

## Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032 CLASS B EN55014-1	
	RE	CISPR32/EN55032 CLASS B EN55014-1	
EMS	RS	IEC/EN61000-4-3 10V/m	perf. Criteria A
		IEC/EN55014-2	perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV	perf. Criteria B
		IEC/EN61000-4-4 ±4KV (EMC Solutions - Recommended Circuit(2-1_),(2-2_	perf. Criteria A
		IEC/EN55014-2	perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line ±2KV	perf. Criteria B
		IEC/EN61000-4-5 line to line ±2KV/line to PE ±4KV(EMC Solutions - Recommended Circuit(2-1_),(2-2_	perf. Criteria A
		IEC/EN55014-2	perf. Criteria A
CS	IEC/EN61000-4-6 10Vr.m.s	perf. Criteria A	
	IEC/EN55014-2	perf. Criteria A	
ESD	IEC/EN61000-4-2 Contact ±8KV / Air ±15KV	perf. Criteria A	

Product Characteristic Curve

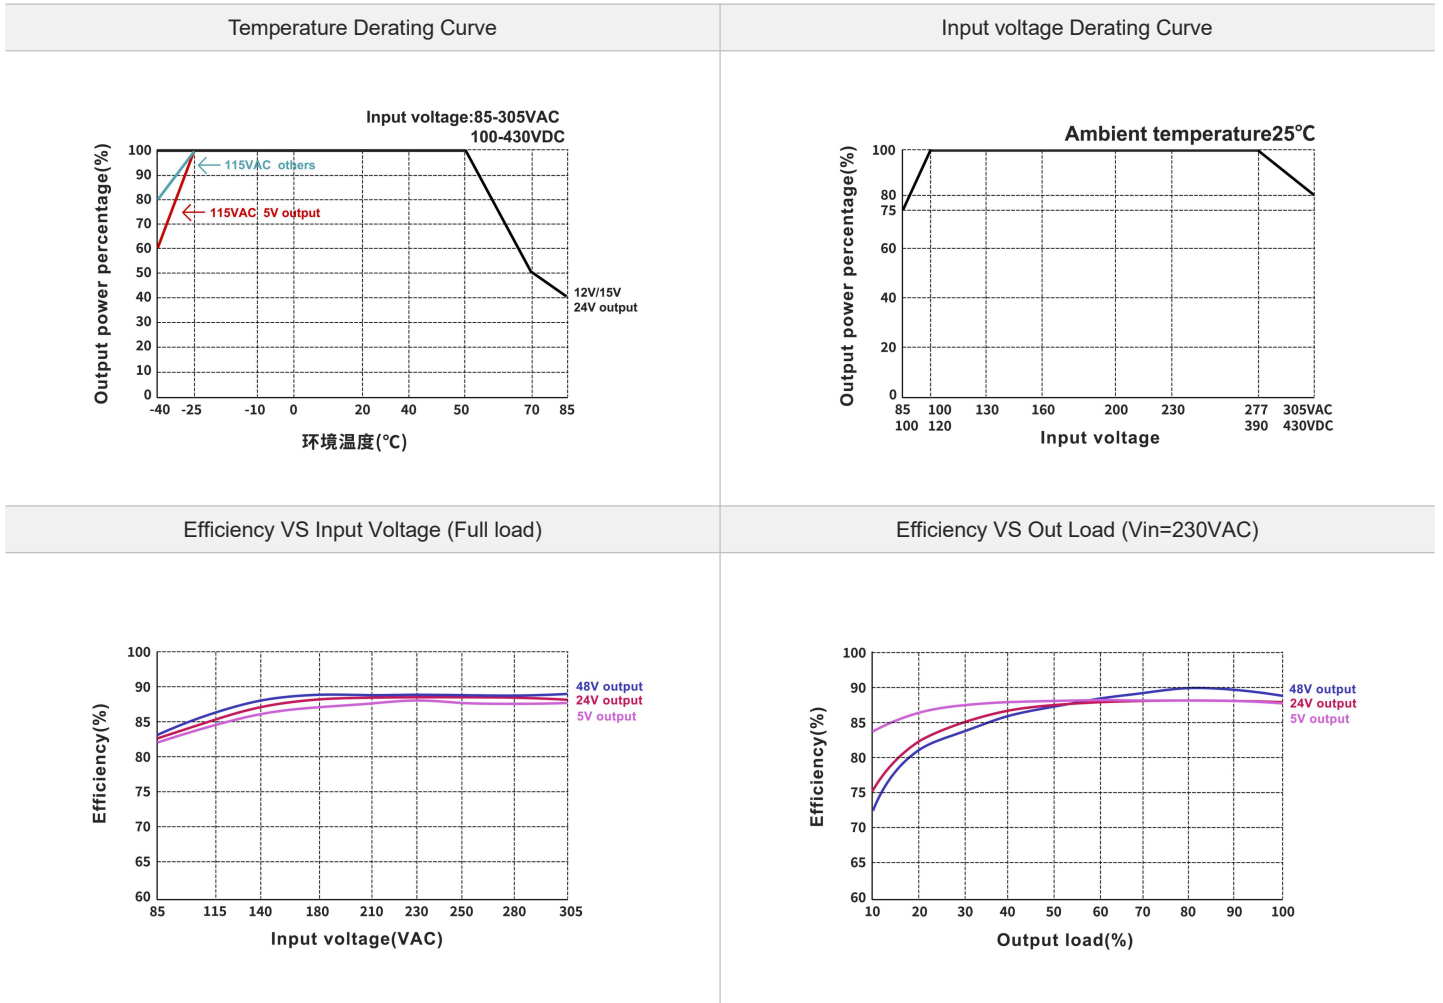


Note:

1. For input voltages of 85-100VAC/277-305VAC, voltage derating should be carried out on the basis of temperature derating.
2. This product is suitable for use in a natural wind-cooled environment.

## Design Reference - Application circuit

Application circuit(Figure 1\_

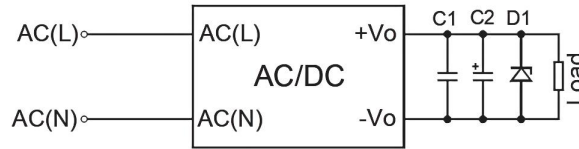


Reference Table for Selection of Peripheral Devices

Part No.	C1	C2	D1
AD30-23S03	1uF/16V	220uF/16V	D1 is a TVS transistor that can protect the downstream circuit in case of module abnormalities. It is recommended to choose a model that is 1.2 times the output voltage.
AD30-23S05	1uF/16V	220uF/16V	
AD30-23S09	1uF/16V	100uF/25V	
AD30-23S12	1uF/16V	100uF/25V	
AD30-23S15	1uF/35V	100uF/35V	
AD30-23S18	1uF/35V	100uF/35V	
AD30-23S24	1uF/35V	100uF/35V	
AD30-23S48	1uF/100V	10uF/63V	


Design Reference - EMC Solutions - Recommended Circuits

EMC Solutions - Recommended Circuits(Figure 2-1\_

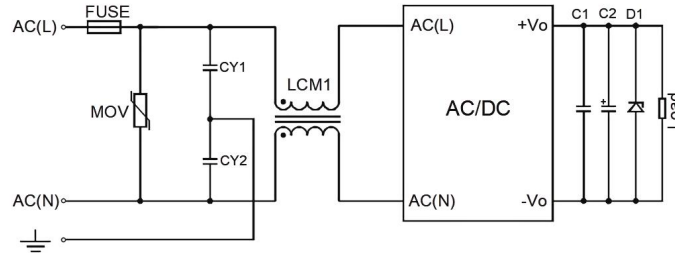

EMC Solutions - Recommended Circuits(Figure 2-2\_


(When the output of the product needs to be connected to PE or connected to PE through Y capacitor,Recommended)

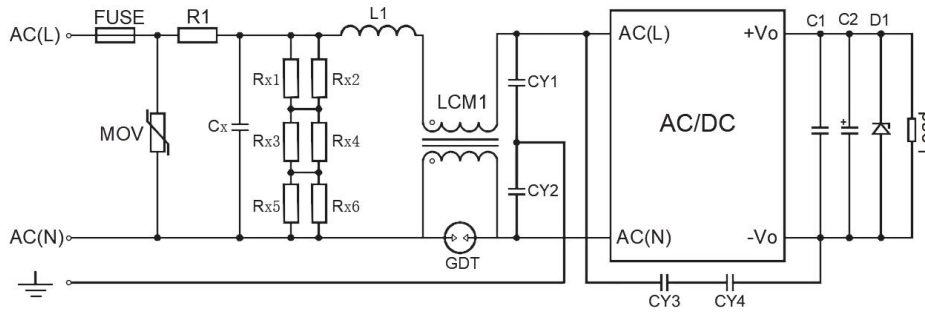

Recommended parameter values for EMC solution circuits	Model	Recommended value
	FUSE	3.15A/300VAC, Slow-blow, Required
	MOV	14D561K
	R1	6.8Ω/5W, Wire-wound resistor, Required
	Cx	0.33uF/305VAC
	L1	1.2mH/0.5A
	CY1,CY2	2.2nF/400VAC
	CY3,CY4	1.0nF/400VAC
	GDT	300V/1KA
	LCM	20mH, Common mode inductance
	Rx1,Rx2,Rx3,Rx4	1.5MΩ/1206
	C1,C2,D1	Refer to typical circuit design and application

## Dimensions and Recommended Layout


AD30-23Sxx Dimensions and Recommended Layout

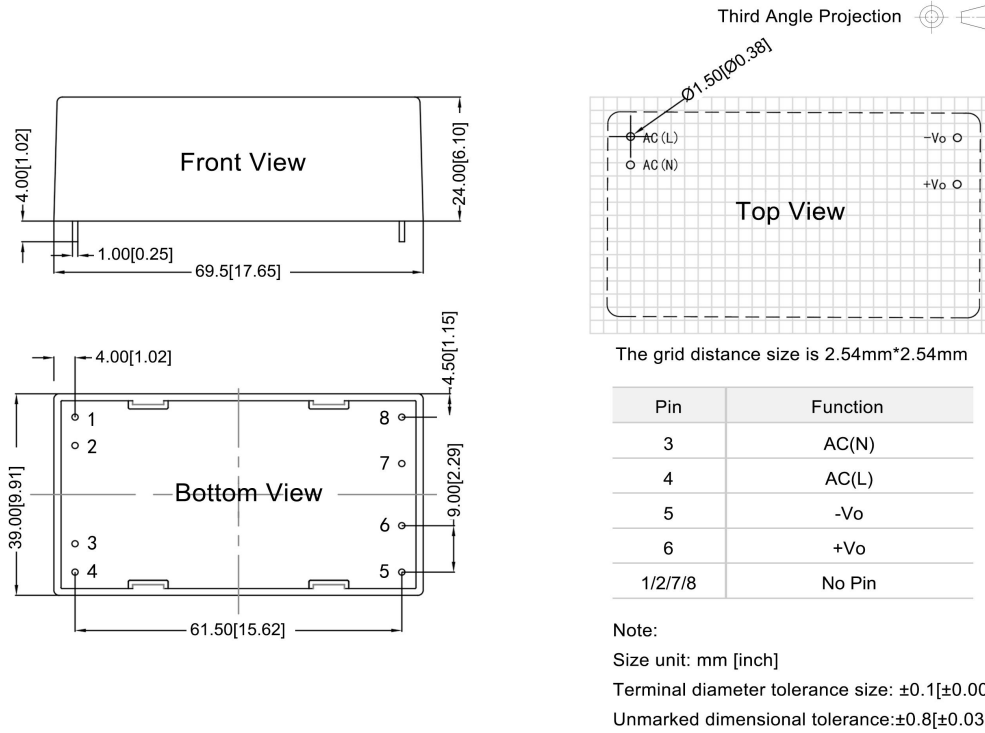

## Packaging Information

Model series	Product quantity(pcs/tray)	Inner carton quantity(pcs/carton)	Outer carton quantity(pcs/carton)
AD30-23Sxx	24	72	144

The schematic diagram of pearl cotton packaging is shown below:

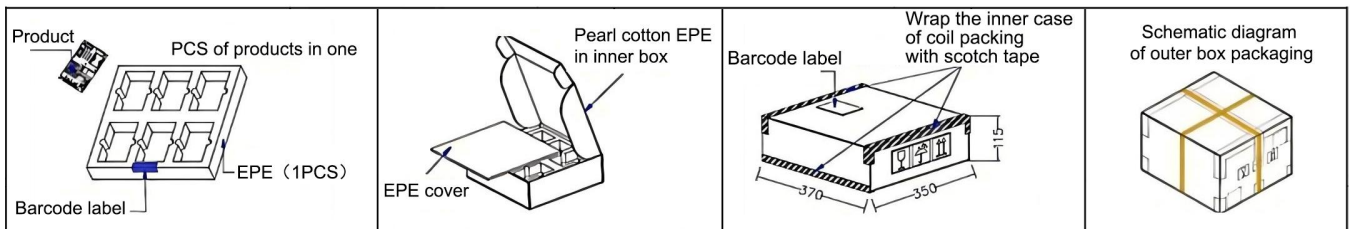

## Product precautions

1. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage;
  2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product;
  3. The maximum capacitive load is tested within the input voltage range and under full load conditions;
  4. Unless otherwise specified, all indicators in this manual are measured at  $T_a=25\text{ }^\circ\text{C}$ , humidity<75% RH, nominal input voltage, and output rated load;
  5. All indicator testing methods in this manual are based on our company's corporate standards;
  6. Our company can provide product customization, and specific requirements can be directly contacted by our technical personnel;
- Product specifications are subject to change without prior notice.

## Manufacturer contact information

### Bettpower Guangzhou Electronic Technology Co., Ltd.

Website: [www.bettpower.com](http://www.bettpower.com)

Telephone: +86 - 020 - 32166256

Email: [info@bettpower.com](mailto:info@bettpower.com)

Address: Room 2514-2515, Building A1, 1 Doutang Road, Huangpu District, Guangzhou, China

BETTPOWER is a registered trademark of BETTPOWER Guangzhou Electronic Technology Co., Ltd. All of its product names, models, trademarks and brands are the property of the Company.

BETTPOWER Guangzhou Electronic Technology Co., Ltd reserves all rights and the right of final interpretation.