


DFR2-xxSxxS Series

DC-DC Converter | 0.25W | SIP4 | Fixed voltage input, unregulated output | 3000VDC

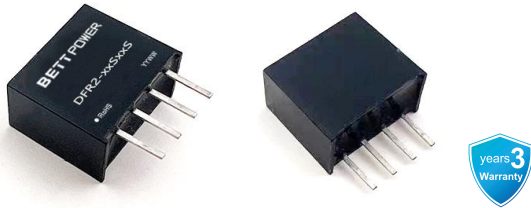

Features

- Compact SIP4 Package
- Operating Temperature Range: -40°C ~ +105°C
- Isolation Voltage: 3000VDC
- Full Load Efficiency: up to 86% (typ.)
- Continuous Short Circuit Protection
- Designed to meet IEC/EN/BS EN/UL 62368

Product Description



The DFR2-xxSxxS series is 0.25W unregulated DC/DC converters that are typically used in cost sensitive general purpose power isolation and voltage matching applications. Typical applications are digital interfaces, voltage conversion in distributed powersy stems, general low-frequency analog circuits, relay drive circuits, data switching circuits etc.

Selection Guide

Certification	Part No.	Input Voltage	Output			Full Load Efficiency (%) Typ.	Capacitive Load (μF) Max.
		Nominal (Range) (VDC)	Voltage (VDC)	Current (mA) Min.	Current (mA) Max.		
EN/UL Pending	DFR2-03S03S	3.3 (2.97~3.63)	3.3	7	76	78	2400
	DFR2-03S05S	3.3 (2.97~3.63)	5	5	50	80	2400
	DFR2-03S09S	3.3 (2.97~3.63)	9	3	28	80	1000
	DFR2-03S12S	3.3 (2.97~3.63)	12	2	21	81	560
	DFR2-03S15S	3.3 (2.97~3.63)	15	2	17	81	560
	DFR2-03S24S	3.3 (2.97~3.63)	24	2	11	82	220
	DFR2-05S03S	5 (4.5~5.5)	3.3	7	76	80	2400
	DFR2-05S05S	5 (4.5~5.5)	5	5	50	81	2400
	DFR2-05S09S	5 (4.5~5.5)	9	3	28	81	1000
	DFR2-05S12S	5 (4.5~5.5)	12	2	21	83	560
	DFR2-05S15S	5 (4.5~5.5)	15	2	17	83	560
	DFR2-05S24S	5 (4.5~5.5)	24	2	11	84	220
	DFR2-12S03S	12 (10.8~13.2)	3.3	7	76	81	2400

Selection Guide

Certification	Part No.	Input Voltage	Output			Full Load Efficiency (%) Typ.	Capacitive Load(μ F) Max.
		Nominal(Range) (VDC)	Voltage (VDC)	Current (mA) Min.	Current (mA) Max.		
EN/UL Pending	DFR2-12S05S	12 (10.8~13.2)	5	5	50	83	2400
	DFR2-12S09S	12 (10.8~13.2)	9	3	28	83	1000
	DFR2-12S12S	12 (10.8~13.2)	12	2	21	84	560
	DFR2-12S15S	12 (10.8~13.2)	15	2	17	84	560
	DFR2-12S24S	12 (10.8~13.2)	24	2	11	85	220
	DFR2-15S03S	15 (13.5~16.5)	3.3	7	76	81	2400
	DFR2-15S05S	15 (13.5~16.5)	5	5	50	83	2400
	DFR2-15S09S	15 (13.5~16.5)	9	3	28	83	1000
	DFR2-15S12S	15 (13.5~16.5)	12	2	21	84	560
	DFR2-15S15S	15 (13.5~16.5)	15	2	17	84	560
	DFR2-15S24S	15 (13.5~16.5)	24	2	11	85	220
	DFR2-24S03S	24 (21.6~26.4)	3.3	7	76	81	2400
	DFR2-24S05S	24 (21.6~26.4)	5	5	50	84	2400
	DFR2-24S09S	24 (21.6~26.4)	9	3	28	84	1000
	DFR2-24S12S	24 (21.6~26.4)	12	2	21	85	560
	DFR2-24S15S	24 (21.6~26.4)	15	2	17	85	560
DFR2-24S24S	24 (21.6~26.4)	24	2	11	86	220	

Note: The above efficiency is measured at nominal input voltage and rated output load.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (Full Load/No-load)	3.3VDC Input	3.3VDC Output	--	97/5	98/7	mA
		5/9VDC Output	--	94/2	96/5	mA
		Others	--	97/2	99/3	mA
	5VDC Input	3.3VDC Output	--	62/5	63/7	mA
		5/9VDC Output	--	61/2	64/5	mA
		Others	--	61/2	63/3	mA
	12VDC Input	3.3VDC Output	--	25/5	26/7	mA
		5/9VDC Output	--	24/2	26/5	mA
		Others	--	25/2	27/3	mA
	15VDC Input	3.3VDC Output	--	20/5	21/7	mA
		5/9VDC Output	--	20/2	21/5	mA
		Others	--	20/2	22/3	mA
	24VDC Input	3.3VDC Output	--	12/5	14/7	mA
		5/9VDC Output	--	12/2	13/5	mA
		Others	--	13/2	14/3	mA
Reflected Ripple Current				15	--	mA
Surge Voltage	3.3VDC Input		-0.7	--	5	VDC
	5VDC Input		-0.7	--	9	VDC
	12VDC Input		-0.7	--	18	VDC
	15VDC Input		-0.7	--	21	VDC
	24VDC Input		-0.7	--	30	VDC
Input Filter Type			Capacitance Filter			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			See Output Regulation Curve			
Line Regulation	Input Voltage Variation: $\pm 1\%$	3.3V Output	--	± 1.5	--	%
		Others	--	± 1.2	--	%
Load regulation	10%~100% load	3.3VDC Output	--	8	--	%
		5VDC Output	--	8	--	%
		9VDC output	--	6	--	%
		12VDC output	--	6	--	%
		15VDC output	--	6	--	%
		24VDC output	--	3	--	%
Ripple & noise	20MHz bandwidth (peak-to-peak)		--	45	120	mV

Temperature coefficient	Full load	--	±0.02	--	%/°C
Short circuit protection		Continuous, self-recovery			

Note: Ripple & noise are measured at 20MHz of bandwidth with a 10uF electrolytic capacitor and a 1uF ceramic capacitor connected inparallel at the output.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, test time 1 minute, leakage current less than 1mA	3000	--	--	VDC
Insulation Resistance	Input-output, insulated voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-Output, 100KHz/0.1V	--	20	--	pF
Operating Temperature	Derating when operating temperature ≥ 85°C (See Temperature derating curve chart)	-40	--	105	°C
Storage Temperature		-55	--	125	°C
Case Temperature Rise	Ta=25°C, Nominal Input, Full Load	--	15	--	°C
Storage Humidity	Non-condensing	5	--	95	%RH
Soldering Profile	Wave soldering	260±5°C; Time: 5-10s			
	Manual soldering	360±10°C; Time: 3-5s			
Switching Frequency	Full load, nominal input voltage	--	220	--	kHz
MTBF	MIL-HDBK-217F@25°C	>3500Kh			

Mechanical Specifications


Case Material	Black flame-retardant and heat-resistant plastic (UL94V-0)
Mechanical Dimensions	11.6 * 6.00 * 10.20mm
Weight	1.3g(typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)


EMI	CE	CISPR32/EN55032 CLASS B (EMC recommended circuit see Fig. 2)
	RE	CISPR32/EN55032 CLASS B (EMC recommended circuit see Fig. 2)
EMS	ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV
Perf. Criteria B		

Product Characteristic Curve


Temperature Derating Curve

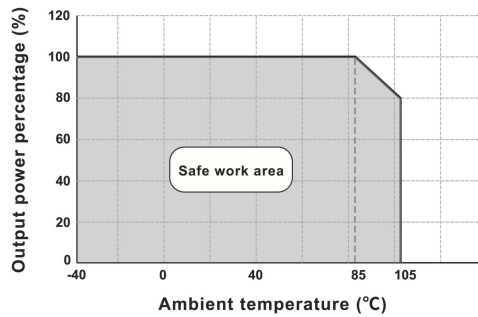


Output Regulation Curve(3.3V Output)

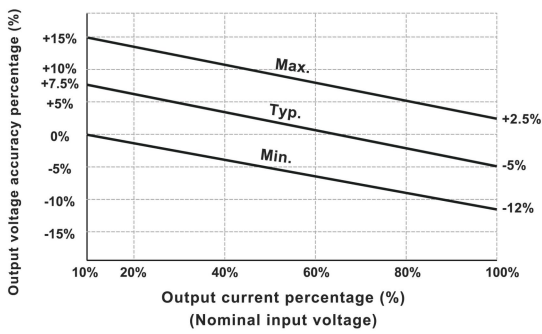


Output Regulation Curve (Others)

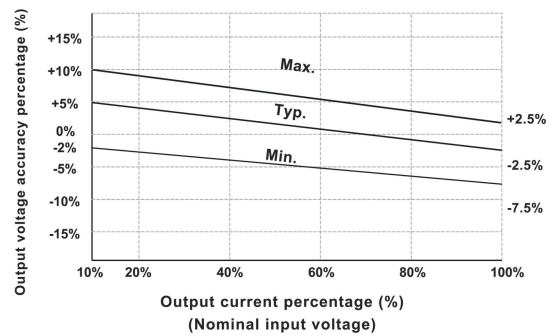

Efficiency vs. Input Voltage (Full Load, DFR2-05S05S)

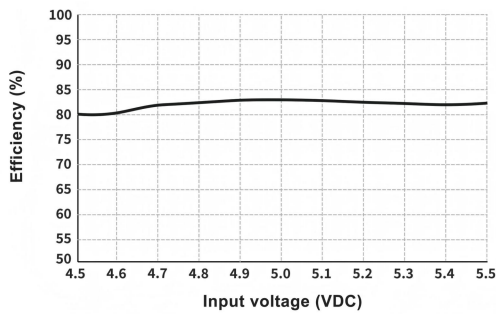


Efficiency vs. Output Load (Vin=5V,DFR2-05S05S)

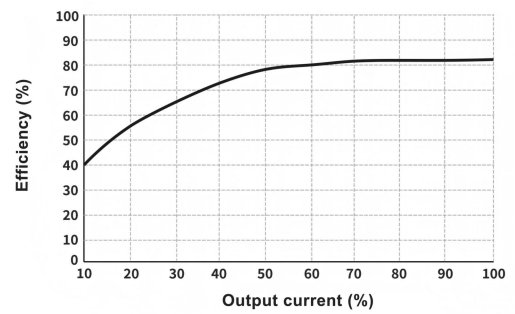

Design Reference - Application circuit

Application circuit

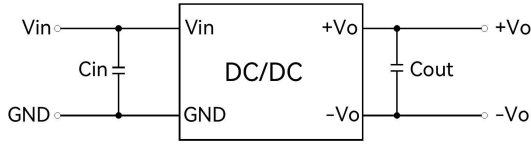

(Figure 1)


Recommended Capacitive Load Value Table

Vin	Cin	Vo	Cout
3.3/5VDC	4.7uF/16V	3.3/5VDC	10uF/16V
9VDC	2.2uF/25V	9VDC	4.7uF/16V
12VDC	2.2uF/25V	12VDC	4.7uF/16V
15VDC	1.0uF/25V	15VDC	1.0uF/25V
24VDC	1.0uF/50V	24VDC	0.47uF/50V

All DC/DC converters in this series are tested according to the recommended application circuit (Figure 1) before the shipment. If further reduction of input and output ripple is required, the external input and output capacitors C_{in} and C_{out} can be increased, or capacitors with lower series equivalent impedance can be selected. For each output, under safe and reliable operating conditions, the maximum capacitance of the filter capacitor must not exceed the maximum capacitive load of the product.

Design Reference - EMC Solutions - Recommended Circuits

EMC Recommended Circuit Design and Application

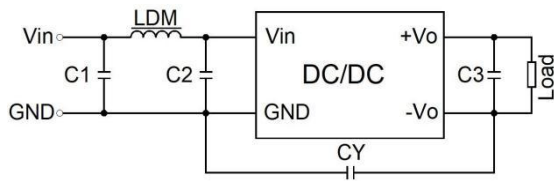

(Figure 2)

Recommended Parameter Table

C1	4.7uF /50V
C2	4.7uF /50V
C3	Refer to Cout parameter in Figure 1
CY	1000pF/2kVDC
LDM	6.8uH

Note:

1. Typical Application

If further reduction of input and output ripple is required, a Capacitance Filter network can be connected at the input and output terminals. The application circuit is shown in Figure 1. However, care should be taken to select an appropriate filter capacitor. If the capacitor is too large, it may cause startup issues. For each output, under conditions ensuring safe and reliable operation, the recommended capacitive load values are detailed in the table.


2. EMC Recommended Circuit: See Figure 2

3. Output Load Requirements

To ensure efficient and reliable operation of the module, the minimum output load during use must not be less than 10% of the rated load. If the required power is indeed low, please connect a resistor in parallel at the output (the sum of the resistor's power dissipation and the actual usage power should be greater than or equal to 10% of the rated power).

Dimensions and Recommended Layout


DFR2-xxSxxS Dimensions and Recommended Layout

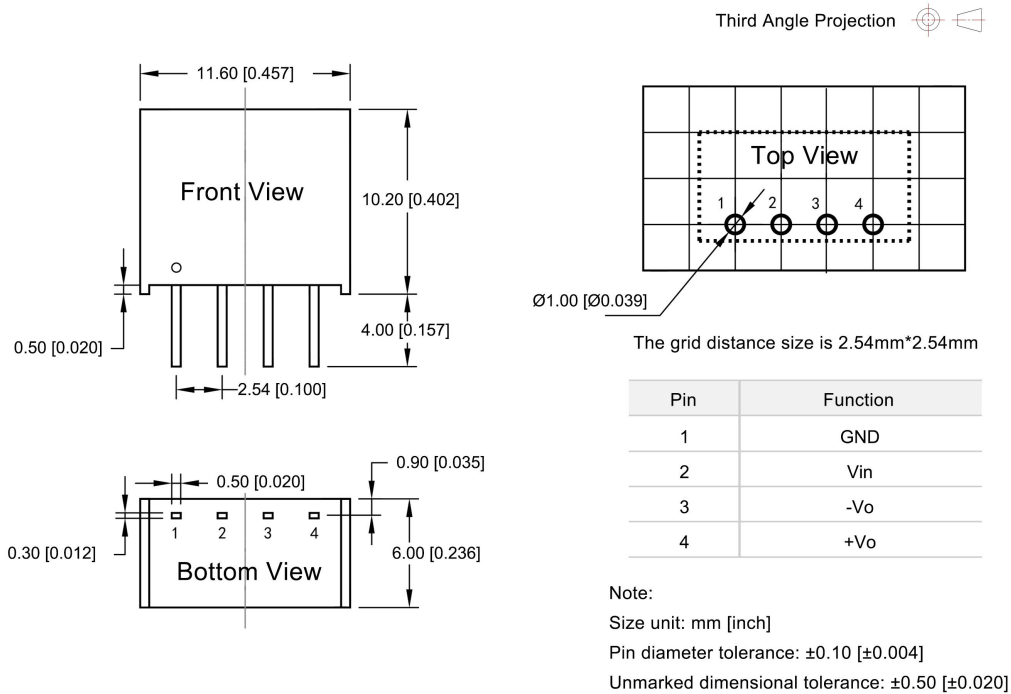

Packaging Information

Model series (Tube packaging)	Quantity per tube (pcs/ tube)	Quantity of electrostatic bag (pcs/ bag)	Quantity of inner box (pcs/ box)	Full box Quantity (pcs)
DFR2-xxSxxS	44	704	2816	11264

The schematic diagram of tube packaging is shown below:

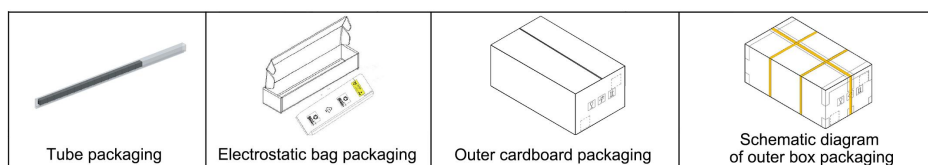

Product precautions

1. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage;
2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product;
3. The maximum capacitive load is tested within the input voltage range and under full load conditions;
4. Unless otherwise specified, all indicators in this manual are measured at $T_a=25\text{ }^\circ\text{C}$, humidity<75% RH, nominal input voltage, and output rated load;
5. All indicator testing methods in this manual are based on our company's corporate standards;
6. Our company can provide product customization, and specific requirements can be directly contacted by our technical personnel;
7. Product specifications are subject to change without prior notice.

Manufacturer contact information

Bettpower Guangzhou Electronic Technology Co., Ltd.

Website: www.bettpower.com

Telephone: +86 - 020 - 32166256

Email: info@bettpower.com

Address: Room 2514-2515, Building A1,1 Doutang Road, Huangpu District, Guangzhou, China

BETTPOWER is a registered trademark of BETTPOWER Guangzhou Electronic Technology Co., Ltd. All of its product names, models, trademarks and brands are the property of the Company.

BETTPOWER Guangzhou Electronic Technology Co., Ltd reserves all rights and the right of final interpretation.