


DH1-xxDxxLS Series

DC-DC Converter | 1W | SIP7 | Fixed voltage input, unregulated output | 6000VDC

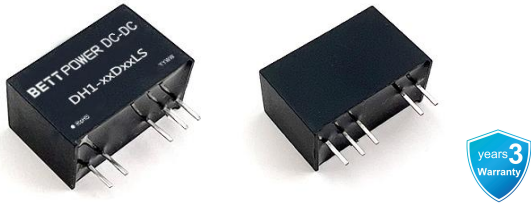

Features

- SIP7 package
- Operating Temperature Range: -40°C ~ +105°C
- Isolation Voltage: 5000VAC/6000VDC
- Full Load Efficiency: up to 90% (typ.)
- Continuous Short Circuit Protection
- CMTI >200kV/μs
- Designed to meet IEC/EN/BS EN/UL 62368

Product Description



The DH1-xxDxxLS series is 1W unregulated DC/DC converters which features high isolation voltage of 5000VAC and 6000VDC and continuous short circuit protection. They are specially designed for applications where require compact size, high isolation, low isolation capacitor and low leakage current power. Typical applications are electricity, IGBT driver applications, etc.

Selection Guide

| Certification | Part No. | Input Voltage | Output | | | Full Load Efficiency (%) Typ. | Capacitive Load (μF) Max. |
|------------------|-------------|--------------------------|------------------|----------------------|----------------------|----------------------------------|------------------------------|
| | | Nominal (Range) (VDC) | Voltage (VDC) | Current (mA) Min. | Current (mA) Max. | | |
| EN/UL Pending | DH1-05D03LS | 5(4.5~5.5) | ±3.3 | ±15 | ±152 | 79 | 1000 |
| | DH1-05D05LS | 5(4.5~5.5) | ±5 | ±10 | ±100 | 82 | 1000 |
| | DH1-05D09LS | 5(4.5~5.5) | ±9 | ±6 | ±56 | 80 | 470 |
| | DH1-05D12LS | 5(4.5~5.5) | ±12 | ±5 | ±42 | 81 | 220 |
| | DH1-05D15LS | 5(4.5~5.5) | ±15 | ±4 | ±34 | 81 | 220 |
| | DH1-05D24LS | 5(4.5~5.5) | ±24 | ±3 | ±21 | 82 | 220 |
| | DH1-12D03LS | 12(10.8~13.2) | ±3.3 | ±15 | ±152 | 77 | 1000 |
| | DH1-12D05LS | 12(10.8~13.2) | ±5 | ±10 | ±100 | 85 | 1000 |
| | DH1-12D09LS | 12(10.8~13.2) | ±9 | ±6 | ±56 | 85 | 470 |
| | DH1-12D12LS | 12(10.8~13.2) | ±12 | ±5 | ±42 | 85 | 220 |
| | DH1-12D15LS | 12(10.8~13.2) | ±15 | ±4 | ±34 | 87 | 220 |
| | DH1-12D24LS | 12(10.8~13.2) | ±24 | ±3 | ±21 | 86 | 220 |
| | DH1-15D03LS | 15 (13.5~16.5) | ±3.3 | ±15 | ±152 | 76 | 1000 |

Selection Guide

| Certification | Part No. | Input Voltage | Output | | | Full Load Efficiency (%) Typ. | Capacitive Load(μ F) Max.* |
|------------------|-------------|-------------------------|------------------|----------------------|----------------------|----------------------------------|------------------------------------|
| | | Nominal(Range) (VDC) | Voltage (VDC) | Current (mA) Min. | Current (mA) Max. | | |
| EN/UL Pending | DH1-15D05LS | 15 (13.5~16.5) | ± 5 | ± 10 | ± 100 | 85 | 1000 |
| | DH1-15D09LS | 15 (13.5~16.5) | ± 9 | ± 6 | ± 56 | 85 | 470 |
| | DH1-15D12LS | 15 (13.5~16.5) | ± 12 | ± 5 | ± 42 | 85 | 220 |
| | DH1-15D15LS | 15 (13.5~16.5) | ± 15 | ± 4 | ± 34 | 88 | 220 |
| | DH1-15D24LS | 15 (13.5~16.5) | ± 24 | ± 3 | ± 21 | 89 | 220 |
| | DH1-24D03LS | 24 (21.6~26.4) | ± 3.3 | ± 15 | ± 152 | 76 | 1000 |
| | DH1-24D05LS | 24 (21.6~26.4) | ± 5 | ± 10 | ± 100 | 85 | 1000 |
| | DH1-24D09LS | 24 (21.6~26.4) | ± 9 | ± 6 | ± 56 | 85 | 470 |
| | DH1-24D12LS | 24 (21.6~26.4) | ± 12 | ± 5 | ± 42 | 87 | 220 |
| | DH1-24D15LS | 24 (21.6~26.4) | ± 15 | ± 4 | ± 34 | 90 | 220 |
| | DH1-24D24LS | 24 (21.6~26.4) | ± 24 | ± 3 | ± 21 | 85 | 220 |

Note:

- *The capacitive load of the two outputs for positive and negative output is the same.
- The above efficiency is measured at nominal input voltage and rated output load.

Input Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|--------------------------------------|----------------------|------------------|------|--------|--------|------|
| Input Current (Full Load/No-load) | 5VDC Input | 3.3VDC Output | -- | 253/40 | 264/60 | mA |
| | | Others | -- | 250/45 | 260/60 | mA |
| | 12VDC Input | 3.3VDC Output | -- | 108/3 | 113/15 | mA |
| | | 5/9/12VDC Output | -- | 98/3 | 103/15 | mA |
| | | Others | -- | 97/3 | 102/15 | mA |
| | 15VDC Input | 3.3VDC Output | -- | 88/3 | 93/15 | mA |
| | | 5/9/12VDC Output | -- | 78/3 | 83/15 | mA |
| | | Others | -- | 75/3 | 80/15 | mA |
| | 24VDC Input | 3.3VDC Output | -- | 55/2 | 58/15 | mA |
| | | 5/9/24VDC Output | -- | 49/2 | 52/15 | mA |
| | | 12VDC Output | -- | 48/2 | 51/15 | mA |
| | | 15VDC Output | -- | 46/2 | 49/15 | mA |
| Reflected Ripple Current | | | -- | 200 | -- | mA |
| Surge Voltage | 5VDC Input | | -0.7 | -- | 9 | VDC |
| | 12VDC Input | | -0.7 | -- | 18 | VDC |
| | 15VDC Input | | -0.7 | -- | 21 | VDC |
| | 24VDC Input | | -0.7 | -- | 30 | VDC |
| Input Filter Type | Capacitance Filter | | | | | |
| Hot Plug | Unavailable | | | | | |

Output Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|--------------------------|---|------------------|-----------------------------|------------|------------|------|
| Output Voltage Accuracy | | | See Output Regulation Curve | | | |
| Line Regulation | Input voltage variation $\pm 1\%$ | | -- | ± 1.2 | ± 1.5 | % |
| Load regulation | 10%~100% load | 3.3, 5VDC output | -- | -- | 20 | % |
| | | Others | -- | -- | 15 | % |
| Ripple & noise | 20MHz bandwidth, 100% load, using parallel line test method | | -- | -- | 150 | mV |
| Temperature coefficient | Full load | | -- | ± 0.01 | ± 0.02 | %/°C |
| Short circuit protection | Continuous, self-recovery | | | | | |

Note: Ripple & noise are measured at 20MHz of bandwidth with a 10uF electrolytic capacitor and a 1uF ceramic capacitor connected inparallel at the output.

General Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-------------------|---|--|------|------|------|------|
| Isolation Voltage | Input-output, test time 1 minute, leakage current less than 1mA | | 5000 | -- | -- | VAC |
| | | | 6000 | -- | -- | VDC |

| | | | | | |
|-----------------------|--|------------------------|-----|-----|-----|
| Insulation Resistance | Input-output, insulated voltage 500VDC | 1000 | -- | -- | MΩ |
| Isolation Capacitance | Input-Output, 100KHz/0.1V | -- | 6 | 10 | pF |
| Operating Temperature | Derating when operating temperature ≥ 85°C (See Temperature derating curve chart) | -40 | -- | 105 | °C |
| Storage Temperature | | -55 | -- | 125 | °C |
| Case Temperature Rise | Ta=25°C, Nominal Input, Full Load | -- | 25 | -- | °C |
| Storage Humidity | Non-condensing | 5 | -- | 95 | %RH |
| Soldering Profile | Wave soldering | 260±5°C; Time: 5 - 10s | | | |
| | Manual soldering | 360±10°C; Time: 3 - 5s | | | |
| Switching Frequency | Full load, nominal input voltage | -- | 250 | -- | kHz |
| MTBF | MIL-HDBK-217F@25°C | >3500Kh | | | |

Mechanical Specifications


| | |
|-----------------------|--|
| Case Material | Black flame-retardant and heat-resistant plastic (UL94V-0) |
| Mechanical Dimensions | 19.50 * 9.80 * 12.50mm |
| Weight | 4.1g (typ.) |
| Cooling Method | Free air convection |

Electromagnetic Compatibility (EMC)


| | | |
|-----|-----|--|
| EMI | CE | CISPR32/EN55032 CLASS B (EMC recommended circuit see Fig. 2) |
| | RE | CISPR32/EN55032 CLASS B (EMC recommended circuit see Fig. 2) |
| EMS | ESD | IEC/EN61000-4-2 Contact ±8KV perf. Criteria B |

Product Characteristic Curve


Temperature Derating Curve

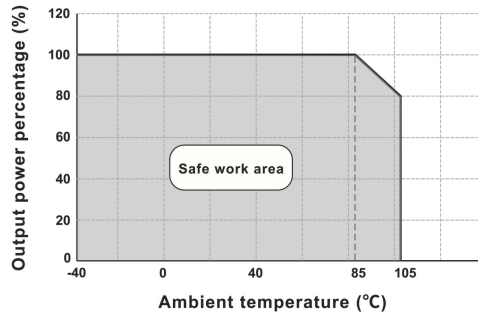


Output Regulation Curve (DH1-05D09LS/DH1-05D12LS)

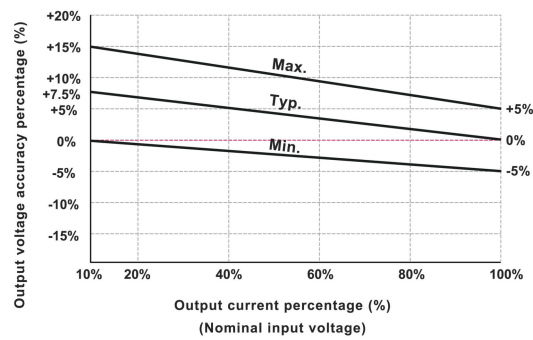

Output Regulation Curve(3.3V Output)

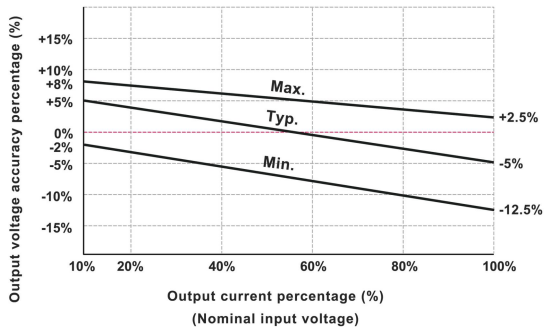


Output Regulation Curve (5/9/12/15/24V Output)

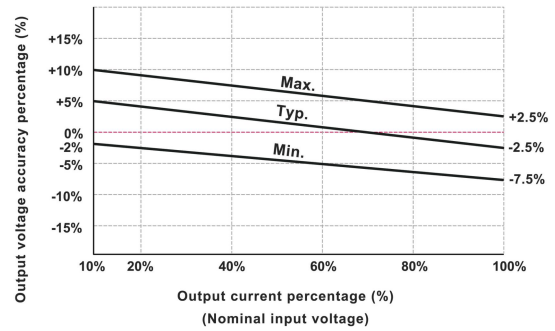

Design Reference - Application circuit

Application circuit

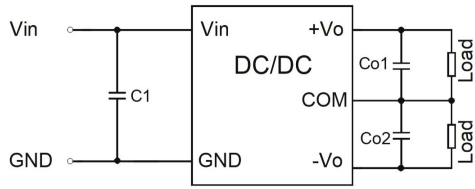

(Figure 1)


Recommended Capacitive Load Value Table

| Vin | Cin | Vo | Co1/Co2 |
|-------|-----------|----------|------------|
| 5VDC | 10uF/10V | 3.3/5VDC | 4.7μF/16V |
| 12VDC | 10uF/25V | 9/12VDC | 2.2μF/25V |
| 15VDC | 2.2uF/25V | 15VDC | 0.47μF/25V |
| 24VDC | 2.2uF/50V | 24VDC | 0.47uF/50V |

All DC/DC converters in this series are tested according to the recommended application circuit (Figure 1) before the shipment. To further reduce input and output ripple, the external input and output capacitors Cin and Cout can be increased, or capacitors with lower series equivalent impedance can be selected. For each output, under safe and reliable operating conditions, the maximum capacitance of the filter capacitor must not exceed the maximum capacitive load of the product.

Design Reference - EMC Solutions - Recommended Circuits

EMC Recommended Circuit Design and Application

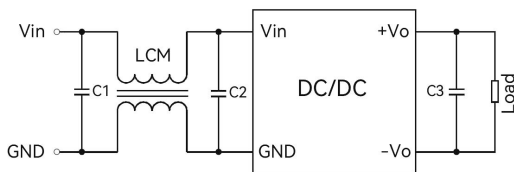

(Figure 2)

Recommended Parameter Table

| | |
|-----|-------------------------------------|
| C1 | 4.7μF /50V |
| C2 | 4.7μF /50V |
| C3 | Refer to Cout parameter in Figure 1 |
| LCM | 22μH (Nickel-Zinc Inductor) |

Note:

1. Typical Application

If further reduction of input and output ripple is required, a Capacitance Filter network can be connected to the input and output terminals. The application circuit is shown in Figure 1. However, care should be taken to select appropriate filter capacitors. If the capacitor is too large, it may cause startup issues. For each output, under conditions ensuring safe and reliable operation, the recommended capacitive load values are detailed in the table.


2. EMC Recommended Circuit: See Figure 2

3. Output Load Requirements

To ensure efficient and reliable operation of the module, the minimum output load during use must not be less than 10% of the rated load. If the required power is indeed small, please connect a resistor in parallel at the output terminal (the sum of the resistor's power dissipation and the actual used power should be greater than or equal to 10% of the rated power).

Dimensions and Recommended Layout

DH1-xxDxxLS Dimensions and Recommended Layout

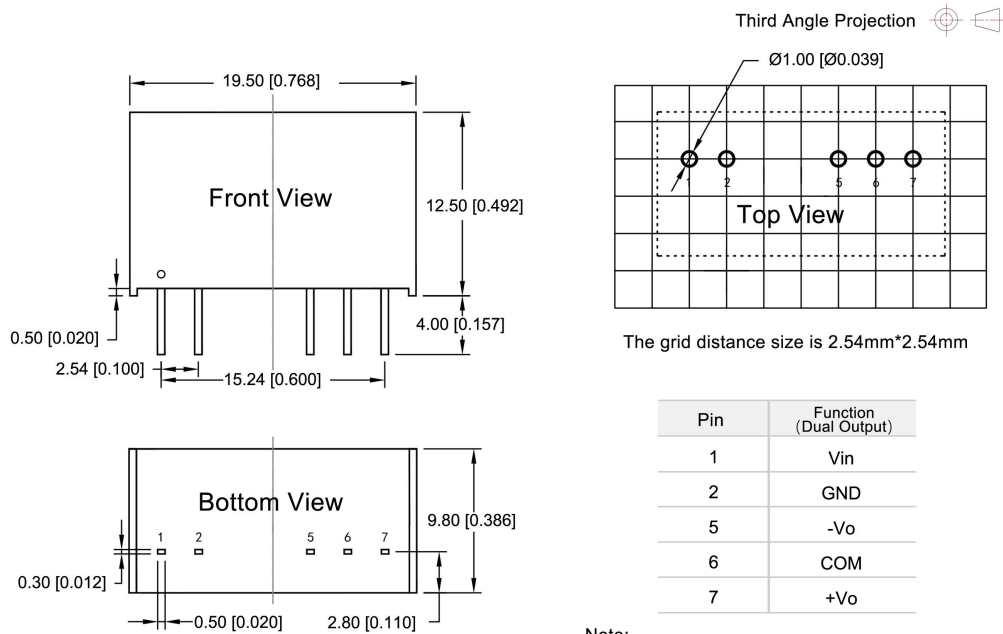


| Pin | Function (Dual Output) |
|-----|------------------------|
| 1 | Vin |
| 2 | GND |
| 5 | -Vo |
| 6 | COM |
| 7 | +Vo |

Note:
 Size unit: mm [inch]
 Pin diameter tolerance: ± 0.10 [± 0.004]
 Unmarked dimensional tolerance: ± 0.50 [± 0.020]

Packaging Information

| Model series (Tube packaging) | Quantity per tube (pcs/ tube) | Quantity of electrostatic bag (pcs/ bag) | Quantity of inner box (pcs/ box) | Full box Quantity (pcs) |
|-------------------------------|-------------------------------|--|----------------------------------|-------------------------|
| DH1-xxDxxLS | 26 | 260 | 780 | 3120 |

The schematic diagram of tube packaging is shown below:

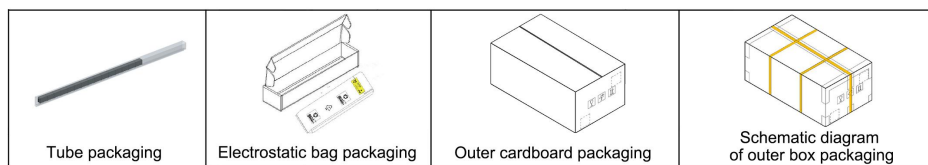

Product precautions

1. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage;
2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product;
3. The maximum capacitive load is tested within the input voltage range and under full load conditions;
4. Unless otherwise specified, all indicators in this manual are measured at $T_a=25\text{ }^\circ\text{C}$, humidity<75% RH, nominal input voltage, and output rated load;
5. All indicator testing methods in this manual are based on our company's corporate standards;
6. Our company can provide product customization, and specific requirements can be directly contacted by our technical personnel;
7. Product specifications are subject to change without prior notice.

Manufacturer contact information

Bettpower Guangzhou Electronic Technology Co., Ltd.

Website: www.bettpower.com

Telephone: +86 - 020 - 32166256

Email: info@bettpower.com

Address: Room 2514-2515, Building A1,1 Doutang Road, Huangpu District, Guangzhou, China

BETTPOWER is a registered trademark of BETTPOWER Guangzhou Electronic Technology Co., Ltd. All of its product names, models, trademarks and brands are the property of the Company.

BETTPOWER Guangzhou Electronic Technology Co., Ltd reserves all rights and the right of final interpretation.