


WF6-xxSxxS Series

DC-DC Converter | 6W | SIP8 | 2:1 Wide Input Voltage, Regulated Output | 3000VDC

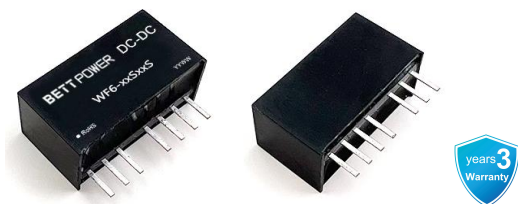

Features

- SIP8 package
- Operating Temperature Range: -40°C ~ +105°C
- 2:1 wide input voltage range
- Isolation voltage: 3000VDC
- Full load efficiency: 86% (typ.)
- Input Under-voltage Protection, Output Short Circuit Protection, Over-current Protection
- Designed to meet IEC/EN/BS EN/UL 62368

Product description



The WF6-xxSxxS series is an industrial-grade DC-DC converter module with 2:1 wide input voltage, regulated output. It features a compact SIP-8 plastic pin package, high efficiency, remote on/off control, and continuous short circuit protection. The small size and cost-effective design make this converter an ideal solution for communication equipment, instrumentation, and industrial electronics applications.

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency (%) Typ.	Capacitive Load (μF) Max.
		Nominal (Range)	Max.	Output Voltage (VDC)	Max. Current (mA)		
EN/UL pending	WF6-05S03S	5(4.5~9)	11	3.3	1350	78	1800
	WF6-05S05S	5(4.5~9)	11	5	1200	80	1000
	WF6-05S06S	5(4.5~9)	11	6	1000	80	680
	WF6-05S09S	5(4.5~9)	11	9	667	82	470
	WF6-05S12S	5(4.5~9)	11	12	500	83	470
	WF6-05S15S	5(4.5~9)	11	15	400	83	220
	WF6-05S24S	5(4.5~9)	11	24	250	83	120
	WF6-12S03S	12 (9~18)	20	3.3	1350	79	1800
	WF6-12S05S	12 (9~18)	20	5	1200	81	1000
	WF6-12S06S	12 (9~18)	20	6	1000	81	680
	WF6-12S09S	12 (9~18)	20	9	667	83	470
	WF6-12S12S	12 (9~18)	20	12	500	84	470
	WF6-12S15S	12 (9~18)	20	15	400	84	220

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency (%) Typ.	Capacitive Load (μF) Max.
		Nominal (Range)	Max.	Output Voltage (VDC)	Max. Current (mA)		
EN pending	WF6-12S24S	12 (9~18)	20	24	250	84	120
	WF6-24S03S	24 (18~36)	40	3.3	1500	81	1800
	WF6-24S05S	24 (18~36)	40	5	1200	83	1000
	WF6-24S06S	24 (18~36)	40	6	1000	83	680
	WF6-24S09S	24 (18~36)	40	9	667	84	470
	WF6-24S12S	24 (18~36)	40	12	500	86	470
	WF6-24S15S	24 (18~36)	40	15	400	86	220
	WF6-24S24S	24 (18~36)	40	24	250	86	120
	WF6-48S03S	48 (36~75)	80	3.3	1500	78	1800
	WF6-48S05S	48 (36~75)	80	5	1200	81	1000
	WF6-48S06S	48 (36~75)	80	6	1000	81	680
	WF6-48S09S	48 (36~75)	80	9	667	82	470
	WF6-48S12S	48 (36~75)	80	12	500	83	470
	WF6-48S15S	48 (36~75)	80	15	400	83	220
	WF6-48S24S	48 (36~75)	80	24	250	83	120

Note:

- 1. The input voltage should not exceed the maximum value, otherwise it may cause permanent and irreparable damage;
- 2. The above efficiency values are measured at nominal input voltage and rated output load.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (Full Load/No-load)	5VDC Input	3.3V Output	--	1142/10	1172/20	mA
		5/6V output	--	1500/20	1538/40	mA
		Others	--	1463/50	1500/80	mA
	12VDC Input	3.3V output	--	470/5	482/15	mA
		5/6V output	--	617/10	633/20	mA
		Others	--	602/20	617/40	mA
	24VDC Input	3.3V Output	--	229/5	235/10	mA
		5/6/9V Output	--	301/5	309/10	
		Others	--	291/15	298/30	mA
	48VDC Input	3.3V Output	--	119/5	122/10	mA
		5/6V Output	--	154/5	158/10	mA
		Others	--	152/15	156/30	mA
Reflected Ripple Current	Input nominal input series		--	50	--	mA
Surge Voltage (1sec.max.)	5VDC Input		-0.7	--	12	VDC
	12VDC Input		-0.7	--	25	VDC
	24VDC Input		-0.7	--	50	VDC
	48VDC Input		-0.7	--	100	VDC
Start-up Voltage	5VDC Input		--	--	4.5	VDC
	12VDC Input		--	--	9	VDC
	24VDC Input		--	--	18	VDC
	48VDC Input		--	--	36	VDC
Input Under-voltage Protection	5VDC Input		3.5	4	--	VDC
	12VDC Input		5.5	6.5	--	VDC
	24VDC Input		5.5	6.5	--	VDC
	48VDC Input		12	15.5	--	VDC
Ctrl	Turn on module		Ctrl pin open or pulled high (TTL2.7-12VDC)			
	Turn off module		Ctrl pin pulled low to GND (0-1.2VDC)			
Input Filter Type			Capacitor filtering			
Hot Plug			Not supported			

Output Specifications

Item	Operating conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	0%~100% load	--	±1.0	±3.0	%
Line Regulation	Full load, input voltage from low limit to high limit	--	±0.5	±1.0	%
Load Regulation	5% to 100% load	--	±0.5	±1.5	%
	0% to 100% load	--	±1.0	±3.0	%

Ripple & Noise	20MHz bandwidth, 5%-100% load		--	80	150	mVp-p
Transient Recovery Time	25% load step change, nominal input voltage		--	300	500	μs
Transient Response Deviation	25% load step change, nominal input voltage	3.3/5/6V output	--	±5	±8	%
		Other outputs	--	±3	±5	%
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Over current Protection	Input Voltage Range		110	160	--	%
Short Circuit Protection	Input Voltage Range		Continuous short circuit, self-recovery			

Note: Ripple & noise are measured at 20MHz of bandwidth with a 10uF electrolytic capacitor and a 1uF ceramic capacitor connected inparallel at the output.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-Output, Test Time 1 minute, leakage current less than 1mA	3000	--	--	VDC
Insulation Resistance	Input-Output, Insulation Voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-Output, 100KHz/0.1V	--	1000	--	pF
Operating Temperature	See: Temperature Derating Curve	-40	--	105	°C
Storage Temperature		-55	--	125	°C
Storage Humidity	No condensation	5	--	95	%RH
Soldering Profile	Wave soldering	260±5°C; Time: 5 - 10s			
	Manual soldering	360±10°C; Time: 3 - 5s			
Switching Frequency	Full load, nominal input voltage	--	300	--	kHz
Vibration		10-150Hz, 5g, 0.75mm, along X, Y and Z			
MTBF	MIL-HDBK-217F@25°C	>1000Kh			

Mechanical Specifications


Case Material	Black flame-retardant heat-resistant plastic (UL94V-0)
Mechanical Dimensions	22.00 * 9.50 * 12.00mm
Weight	4.9g (typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)


EMI	CE	CISPR32/EN55032 CLASS B (Recommended circuit see Figure 2-②)			
	RE	CISPR32/EN55032 CLASS B (Recommended circuit see Figure 2-②)			
EMS	ESD	IEC/EN61000-4-2 Contact ±4KV			perf. Criteria B
	RS	IEC/EN61000-4-3 10V/m			perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV (Recommended circuit see Figure 2-①)			perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line ±2KV (Recommended circuit see Figure 2-①)			perf. Criteria B
	CS	IEC/EN61000-4-6 3Vr.m.s			perf. Criteria A

Product Characteristic Curve


Temperature Derating Curve (5/12/24V nominal input)

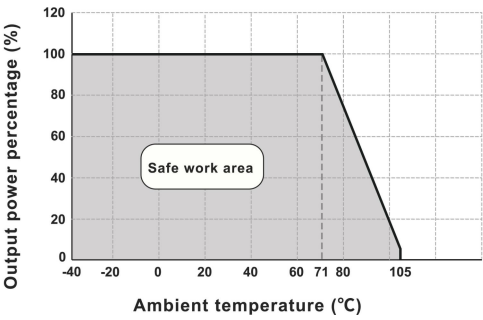


Temperature Derating Curve (48V nominal input)

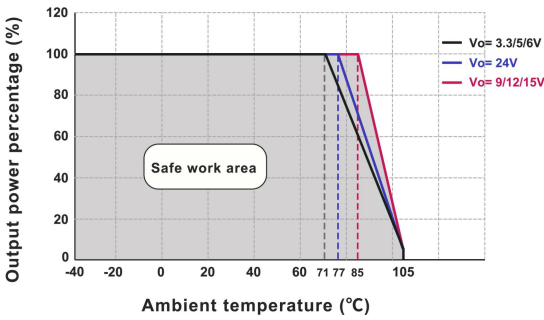

Efficiency VS Input Voltage (Full load, WF6-24S05S)

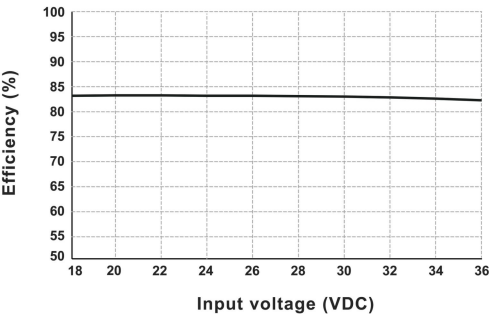


Efficiency VS Output Load (Vin=24V, WF6-24S05S)

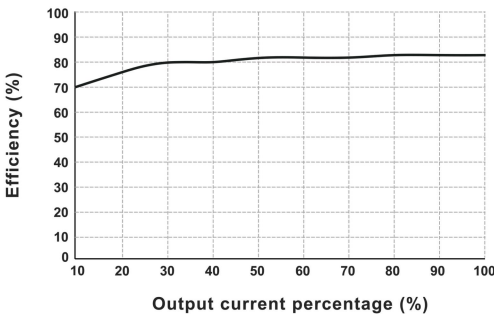

Design Reference - Application Circuit

Application circuit

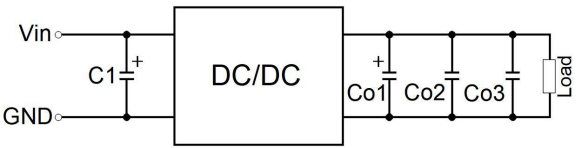

(Figure 1)


Recommended Capacitive Load Value Table

Vout	C1	Co1	Co2	Co3
3.3/5/6VDC	100μF/100V	100μF/16V	10μF/50V	0.1μF/16V
9/12/15VDC	100μF/100V	100μF/25V	10μF/50V	0.1μF/25V
18/24/28VDC	100μF/100V	100μF/50V	10μF/50V	0.1μF/50V

All DC/DC converters in this series are tested before shipment using the recommended application circuit (Figure 1). To further reduce input and output ripple, increase the external input and output capacitors C1, Co1, Co2, Co3 or select capacitors with lower series equivalent impedance. For each output, under safe and reliable operating conditions, the maximum capacitance of the filter capacitor must not exceed the maximum capacitive load of the product.

Design Reference - EMC Solutions - Recommended Circuits

EMC Recommended Circuit Design and Application

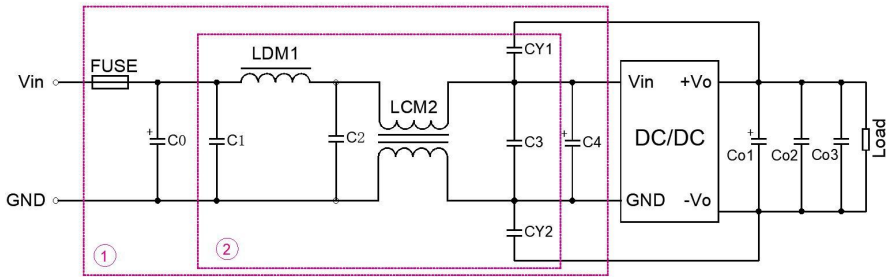

(Figure 2)


Recommended Parameter Table

Model	Vin:5VDC	Vin:12VDC	Vin:24VDC	Vin:48VDC
FUSE	Select according to the actual input current			
C0/C4	330μF/25V	330μF/25V	330μF/50V	330μF/100V
C1/C2/C3	10μF/50V			10μF/100V
LDM1	10μH			
LCM2	470μH			
Co1/Co2/Co3	Refer to capacitor parameters in Figure 1			
CY1/CY2	1nF/400VAC			

Note: Part ① is used for EMC testing; Part ② is used for EMI filtering, selectable based on requirements.

Dimensions and Recommended Layout


WF6-xxSxxS Dimensions and Recommended Layout

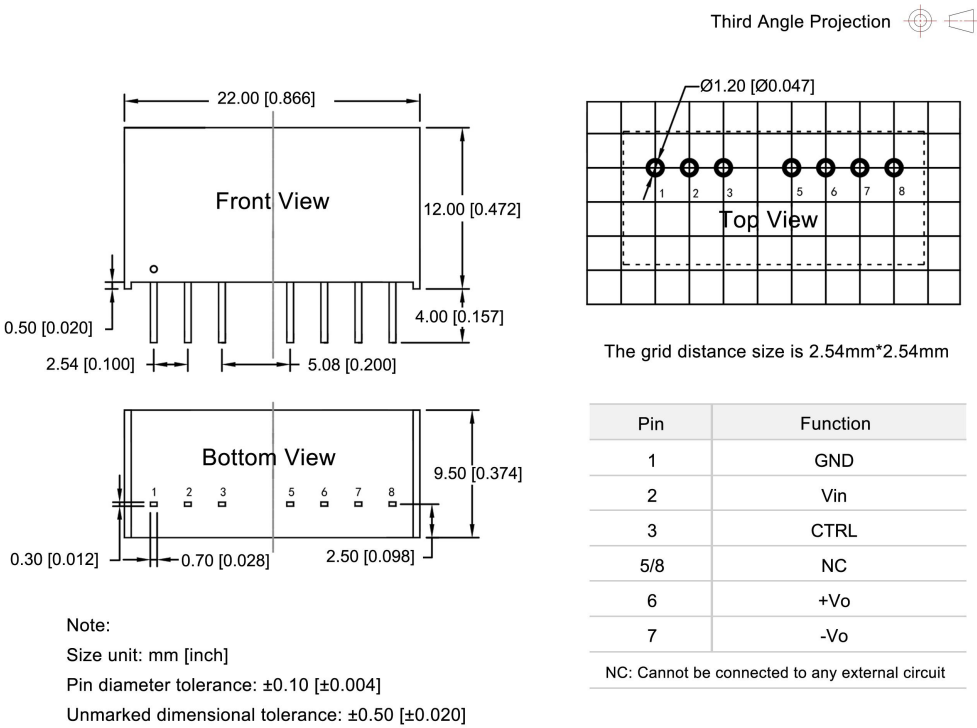

Packaging Information

Model series (Tube packaging)	Quantity per tube (pcs/ tube)	Quantity of electrostatic bag (pcs/ bag)	Quantity of inner box (pcs/ box)	Full box Quantity (pcs)
WF6-xxSxxS	23	230	920	3680

The schematic diagram of tube packaging is shown below:

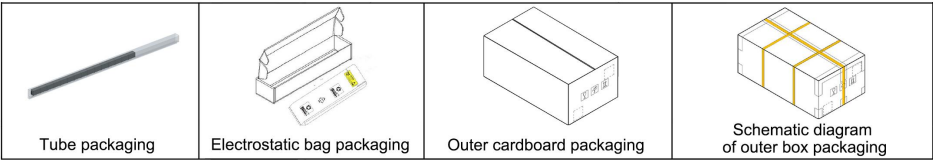

Product precautions

1. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage;
2. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product;
3. The maximum capacitive load is tested within the input voltage range and under full load conditions;
4. Unless otherwise specified, all indicators in this manual are measured at Ta=25 °C, humidity<75% RH, nominal input voltage, and output rated load;
5. All indicator testing methods in this manual are based on our company's corporate standards;
6. Our company can provide product customization, and specific requirements can be directly contacted by our technical personnel;
7. Product specifications are subject to change without prior notice.

Manufacturer contact information

Bettpower Guangzhou Electronic Technology Co., Ltd.

Website: www.bettpower.com

Telephone: +86 - 020 - 32166256

Email: info@bettpower.com

Address: Room 2514-2515, Building A1,1 Doutang Road, Huangpu District, Guangzhou, China

BETTPOWER is a registered trademark of BETTPOWER Guangzhou Electronic Technology Co., Ltd. All of its product names, models, trademarks and brands are the property of the Company.

BETTPOWER Guangzhou Electronic Technology Co., Ltd reserves all rights and the right of final interpretation.